


Narrow electric articulating booms

Z-40/23N RJ

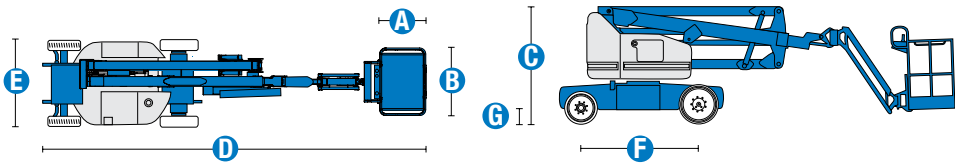

MODELS Z™-40/23N RJ


MEASUREMENTS	US	Metric
Working height maximum*	46 ft 5 in	14.32 m
Platform height maximum	40 ft 5 in	12.32 m
Horizontal reach maximum	22 ft 8 in	6.91 m
Up and over clearance maximum	21 ft 3 in	6.48 m
A Platform length	2 ft 6 in	.76 m
B Platform width	3 ft 10 in	1.17 m
C Height - stowed	6 ft 6 in	1.98 m
D Length - stowed	21 ft 5 in	6.53 m
E Width	4 ft 11 in	1.50 m
F Wheelbase	6 ft 5 in	1.96 m
G Ground clearance - center	7 in	.18 m

PRODUCTIVITY

Lift capacity	500 lbs	227 kg
Platform rotation	180°	
Vertical jib rotation	130°	
Horizontal jib rotation	180°	
Turntable rotation	355° non-continuous	
Turntable tailswing	5 in	.13 m
Drive speed - stowed	4.5 mph	7.2 km/h
Drive speed - raised**	0.68 mph	1.1 km/h
Gradeability - stowed***	30%	
Turning radius - inside	2 ft 11 in	.87 m
Turning radius - outside	10 ft 6 in	3.20 m
Controls	24 V DC proportional	
Tyres - front	22x7x17.75 in	.56x.18x.45 m
Tyres - rear	25.6 x 7 in	.64 x .18m

WEIGHT***	15,230 lbs	6,908 kg	15,300 lbs	6,940 kg
-----------	------------	----------	------------	----------

RANGE OF MOTION Z™-40/23N RJ

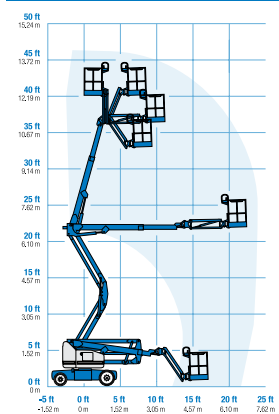

JIB RANGE OF MOTION Z™-40/23N RJ

