
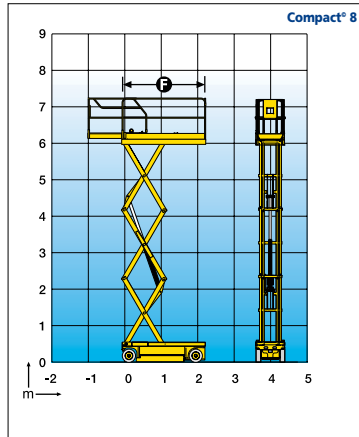


Narrow aisle electric scissor lifts

Compact 8 & 10 N

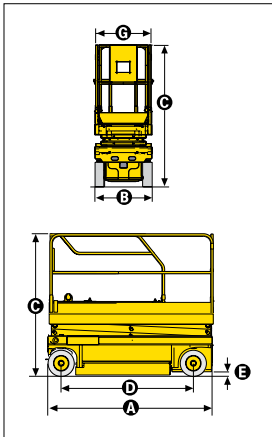

SPECIFICATIONS

	Compact 8		Compact 10 N	
	Working height	26 ft 1 in	8.18 m	32 ft 10 in
Platform height	20 ft 3 in	6.18 m	26 ft 3 in	8 m
Driveable at full height	20 ft 3 in	6.18 m	26 ft 3 in	8 m
Platform capacity (total)	770 lb - 350 kg		500 lb - 230 kg	
Ⓐ Stowed length	7 ft 7 in - 2.31 m			
with access steps	8 ft 2 in - 2.48 m			
ⓑ Width	32 in - 0.81 m			
Ⓒ Stowed height	6 ft 6 in	1.99 m	7 ft 2 in	2.18 m
Transport height	2 ft 10 in	1.14 m	3 ft 6 in	1.33 m
Ⓓ Wheelbase	6 ft 1 in - 1.86 m			
Ⓔ Ground clearance	5 in - 12.5 cm			
with deployed Pot Hole	1 in - 2.5 cm			
ⓍxⓎ Platform size	7 ft 7 in X 2 ft 7 in - 2.3 m x 0.8 m			
Extension : Size	3 ft - 0.92 m			
Extension : Capacity	330 lb - 150 kg		260 lb - 120 kg	
Drive speed	0.6 - 2.2 mph - 1 km/h - 3.5 km/h			
Inside turning radius	13 in - 0.34 m			
Outside turning radius	7 ft 10 in - 2.38 m			
Lift / lower speed (sec.)	37 / 41 sec		51/42 sec.	
Gradeability	25%		23%	
Tilt Alarm	2°			
Controls	Proportional			
Batteries (amp/h)	180		180	
Tyres (solid / non marking)	15 x 5 x 2 in - 38 x 13 x 5 cm			
Hydraulic tank	6.6 gal - 27 l			
Weight	3.815 lb	1.730 kg	4.760 lb	2.160 kg