


# Rough-terrain diesel scissor lifts

## GS-4390 RT & 5390 RT

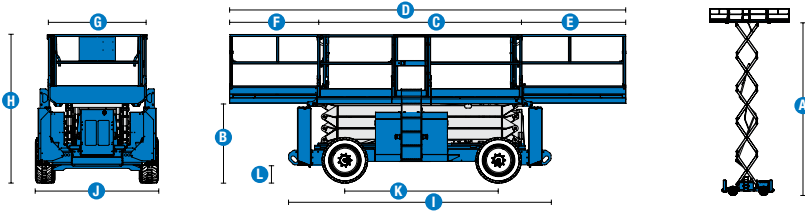

MODELS	GS™-4390 RT		GS™-5390 RT	
	US	Metric	US	Metric
Working height maximum*	49 ft	15.11 m	59 ft	18.15 m
<b>A</b> Platform height maximum	43 ft	13.11 m	53 ft	16.15 m
<b>B</b> Platform height - stowed**	5 ft 11 in	1.80 m	6 ft 7.5 in	2.02 m
<b>C</b> Platform length:				
outside, extended - single deck	13 ft .5 in	3.98 m	13 ft .5 in	3.98 m
outside, extended - dual deck	17 ft 6.25 in	5.34 m	17 ft 6.25 in	5.34 m
<b>D</b> Slide-out platform extension deck - front	21 ft 6.5 in	6.57 m	21 ft 6.5 in	6.57 m
<b>E</b> Slide-out platform extension deck - rear	5 ft	1.52 m	5 ft	1.52 m
<b>F</b> Slide-out platform extension deck - rear	4 ft	1.22 m	4 ft	1.22 m
<b>G</b> Platform width - outside	6 ft	1.83 m	6 ft	1.83 m
<b>H</b> Height:				
stowed	9 ft 7.5 in	2.93 m	10 ft 4 in	3.15 m
stowed - rails lowered	7 ft 4.75 in	2.25 m	8 ft 1.25 in	2.47 m
<b>I</b> Length - stowed:				
single deck	12 ft 11.25 in	3.94 m	—†	—
dual deck	13 ft .5 in	3.98 m	—	—
with outriggers	16 ft	4.88 m	16 ft	4.88 m
Length - extended:				
single deck	17 ft 8.5 in	5.40 m	17 ft 8.5 in	5.40 m
dual deck	21 ft 6.5 in	6.57 m	21 ft 6.5 in	6.57 m
<b>J</b> Width:				
standard tires	7 ft 6 in	2.29 m	7 ft 6 in	2.29 m
high flotation tires	8 ft 5 in	2.57 m	8 ft 5 in	2.57 m
<b>K</b> Wheelbase	9 ft 4 in	2.84 m	9 ft 4 in	2.84 m
<b>L</b> Ground clearance - center	1 ft 2 in	.36 m	1 ft 2 in	.36 m

### PRODUCTIVITY

Maximum platform occupancy***	7	7	6	6
Lift capacity	1,500 lbs	680 kg	1,500 lbs	680 kg
Lift capacity - extension deck	500 lbs	227 kg	500 lbs	227 kg
Drive height	full height		30 ft	9.14 m
Drive speed - stowed	5.0 mph	8.0 km/h	5.0 mph	8.0 km/h
Drive speed - raised	0.7 mph	1.1 km/h	0.7 mph	1.1 km/h
Gradeability - stowed****	50%		40%	
Maximum outrigger leveling: front to back	7°		7°	
side to side	12°		12°	
Turning radius - inside	7 ft 1 in	2.16 m	7 ft 1 in	2.16 m
Turning radius - outside	17 ft 6 in	5.33 m	17 ft 6 in	5.33 m
Controls	proportional		proportional	
Drive	four wheel		four wheel	
Raise / lower speed	45 / 39 sec		55 / 49 sec	
Tyres - foam-filled rough terrain	12 x 33 in	30 x 84 cm	12 x 33 in	30 x 84 cm

### WEIGHT\*\*\*\*\*

	13,086 lbs	5,936 kg	16,616 lbs	7,537 kg
--	------------	----------	------------	----------

† GS-5390 comes standard with outriggers.  
Machine length with outriggers represents overall length.