


Vertical mast lifts

Runabout GR-12 & GR-15

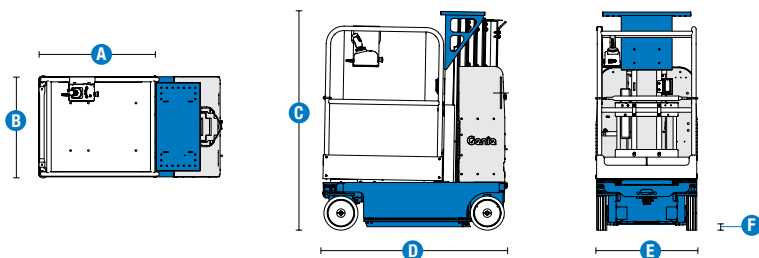

MODELS	GR™-12		GR™-15	
	US	Metric	US	Metric
Working height*	17 ft 5 in	5.48 m	20 ft 8 in	6.47 m
Platform height	11 ft 5 in	3.48 m	14 ft 8 in	4.47 m
A B Platform dimensions(length x width)				
Standard	35 x 29.5 in	.89 x .75 m	35 x 29.5 in	.89 x .75 m
Standard with extension	55 x 29.5 in	1.4 x .75 m	55 x 29.5 in	1.4 x .75 m
Stock picker	35 x 28.75 in	.89 x .73 m	35 x 28.75 in	.89 x .73 m
Stock picker w/adjustable tray	56 x 28.75 in	1.4 x .73 m	56 x 28.75 in	1.4 x .73 m
Standard AWP****	27 x 26 in	.69 x .66 m	27 x 26 in	.69 x .66 m
Narrow AWP****	26 x 20 in	.66 x .51 m	26 x 20 in	.66 x .51 m
C Height - stowed	5 ft 2 in	1.57 m	5 ft 2 in	1.57 m
D Length - stowed	4 ft 5 in	1.35 m	4 ft 5 in	1.35 m
E Width	2 ft 5.5 in	.75 m	2 ft 5.5 in	.75 m
F Ground clearance - center	2.5 in	.06 m	2.5 in	.06 m

PRODUCTIVITY				
Lift capacity	500 lbs	227 kg	500 lbs	227 kg
Lift capacity - extension deck	250 lbs	113 kg	250 lbs	113 kg
Drive speed - stowed	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h
Drive speed - raised	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h
Gradeability**	30%		30%	
Turning radius - inside	zero		zero	
- outside	4 ft 7 in	1.42 m	4 ft 7 in	1.42 m
Raise / lower speed	20 / 18 sec	20 / 18 sec	21 / 19 sec	21 / 19 sec
Controls	24V DC proportional		24V DC proportional	
Tyres - solid non-marking	10 x 3 x 8 in	25 x 8 x 20 cm	10 x 3 x 8 in	25 x 8 x 20 cm

WEIGHT***				
	1,581 lbs	717 kg	2,192 lbs	994 kg